


Pneumatic strapping tool for polypropylene and polyester strap with vibration sealing



New cooling welding time indicator

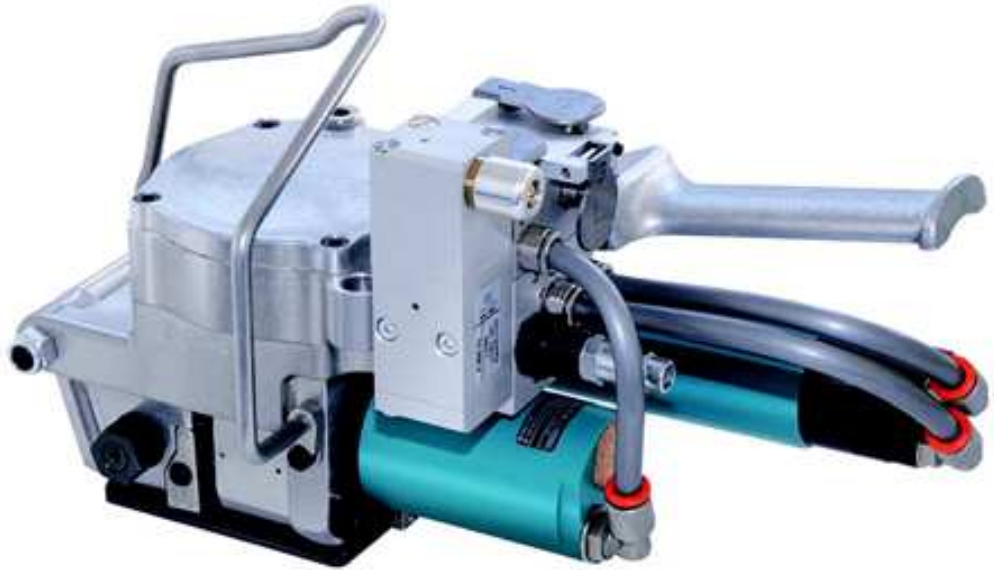

TECHNICAL SPECIFICATIONS

DIMENSIONS

Length	300 mm • 11"
Width	150 mm • 6"
Height	175 mm • 6.9"
Weight	5.1 Kgs • 11.2 lbs

FEEDING

Pressure range	4.5 -7 bar / 64-99 psi
Air consumption	14 L/s - 29 cuft/min

PERFORMANCE

Max. tension force	3500 N - 6.5 bar - 92 psi
Tensioning speed	9 mt/m
Sealing	Vibration sealing
Joint strength	80% of breaking strength*
Gear ratio	-

* variable according to strap type

MODEL

CODE	TYPE	STRAP	THICKNESS
T111323	ITA11 / 13mm	PP-PET	0.7-1.4 mm 0.028"- 0.055"
		13 mm • 1/2"	
T119923	ITA11 / 16-19mm	PP-PET	0.7-1.4 mm 0.028"-0.055"
		16-19 mm • 5/8"-3/4"	

POLYESTER STRAP



POLYESTER STRAP



POLYPROPYLENE STRAP



Pakmak Ambalaj Paketleme Makineleri
 10016 Sk. No.6 AOSB Çiğli / İzmir
 0 232 328 10 51
 info@pakmak.com

